

Command Every Screen Control Every Layer

P80 is not just another switcher—it's the command center for your most demanding productions. Built to handle up to 16x 4K inputs with effortless precision, P80 empowers operators to master every screen and every layer without compromise. From flawless keying and seamless cut & fill to dramatic live effects, transitions feel instantaneous and under total


Designed for mission-critical shows, P80 delivers dual independent MVR outputs, full-link HDR conversion, and rock-solid reliability. Its 7-inch touchscreen and PixelFlow integration put streamlined control at your fingertips, whether you're driving a live broadcast, a massive stage, or a high-stakes corporate event. With P80, you don't just manage visuals—you command the entire experience.

























🚺 PIXELHUE

P80

Versatile 4K Connectivity

The P80 presentation switcher features versatile 4K connectivity including HDMI 2.0, DP 1.2 and 12G-SDI. The P80 is designed with 12x fixed concurrent 4K inputs and a swappable P_HDMI2.0_DP1.2_OPT Link Card containing 4x concurrent 4K inputs, allowing for exceptional input flexibility. This input card can be swapped in future updates, making the P80 more capable. The P80 comes with 8x HDMI 2.0 main output connectors allowing for up to 4x 4K concurrent outputs (copy mode) or 8x DL concurrent outputs (split

The P80 also supports 4x 4K flex outputs, 4x 12G-SDI matrix outputs, and 2x dedicated Multiviewer outputs. Additionally, 8x 10G SFP optical ports are offered to copy the HDMI 2.0 outputs, allowing for

Powerful Functionalities

The P80 employs FPGA-based high-performance image enhancement architecture and real 4K60p 4:4:4 10-bit internal video processing. The P80 supports up to $8x\ 4K$ mixing main layers and 4x4K mixing PIP layers. Up to 256 presets and 256 layer presets can be saved for easy recall. This powerful multi-screen and multi-layer presentation switcher is ideal for medium to large-scale live events and permanent video wall installations requiring high reliability, unrivaled ease of use, optimal image quality and cutting-edge live 4K processing features. Seamless transitions, smooth video display and various visual effects maximize audience engagement.

Flex Output

The P80 comes with 4x HDMI 2.0 for flex outputs with support for up to 4x 4K flex screens. Transition effects such as fade, test patterns, AOI, virtual pixels, and more are available for the flex screens. Up to 4x 4K mixing PIP layers and 4x still BKG are supported, allowing for adjustment of layer position, size and Zorder, layer effects including flip, crop and mask, layer color adjustment, and layer presets. In addition, flex outputs support Multiviewer. Auxiliary devices such as teleprompters also can be connected to the flex output connectors. The flex outputs expand the range of the application scenarios of the P80

SDI Matrix

4x 12G-SDI are provided for matrix outputs, allowing any content from the input sources such as HDMI 2.0, DP 1.2 and 12G-SDI, MVR, PGM and flex outputs to be mapped to the SDI matrix. SDI matrix offers more flexible output options for users and enhances the versatility of the P80.

Flexible Control Options

The P80 is exceptionally easy to control via any of the following options:

- 7-inch graphical touchscreen on the front panel
- Event controller U5/U5 Pro Event management software PixelFlow
- Third-party control system Stream Deck (Companion integrated into the P80)

In addition, multiple P80 units can be controlled simultaneously from a single event controller/PC with PixelFlow when they are on the same LAN and in the same project

4K Presentation Switcher



KEY FEATURES

Versatile 4K connectivity: HDMI 2.0, DP 1.2 and 12G-SDI

Up to 16x concurrent 4K inputs

8x HDMI 2.0 main output connectors configurable as independent screens or

Up to 4x 4K concurrent main outputs (copy mode) or 8x DL concurrent main outputs (split mode)

 $8x\,10G$ SFP optical ports for copying output and long-distance signal

4x HDMI 2.0 flex outputs with support for up to 4x flex screens

 $4x\,12G\mbox{-SDI}$ matrix for mapping any content from the input sources, MVR, PGM

and flex outputs to the output 2x HDMI 2.0 for connecting to Multiviewer screens

Up to 8x 4K mixing main layers and up to 4x 4K mixing PIP layers

Up to 256 relative and complete presets for easy recall Free conversion between SDR, HDR10 and HLG

Advanced DSK capability: smart key, chroma key and luma key Device backup, copying output, input source backup, and dual power supply

redundancy to guarantee stability and reliability Visualized live view of input and output connector statuses for easy

Virtual pixel function for convenient layer configuration

Multiple standard timings such as DMT, CEA, SMPTE and VESA

Custom EDID with support for reduced blanking and HBlank settings Compatible with EDID on Mac and support for Mac mosaic HDCP 1.3, HDCP 1.4 and HDCP 2.2 for full-link content protection with a global

switch for all inputs or outputs Antistatic settings to keep events smooth and successful

Rugged 4RU chassis with cleanable dust filter

The system has passed 24/7 stability tests and is proven to be stable and

SWAPPABLE INPUT CARD

P_HDMI2.0_DP1.2_OPT Link Card

*In future updates, this input card can be swapped and more cards will be available.

- 2x HDMI 2.0/DP1.2 (Only one type of connector can be selected as the input source at the same time.)
- 2x OPT (100G) for linking to more devices to share input sources (*to be implemented in future updates)
- HDMI 2.0
- Maximum resolution: 4096×2160@60Hz 8bit 4:4:4 Maximum width: 8192 pixels (8192×1080@60Hz)
 Maximum height: 7680 pixels (1080×7680@60Hz)
- Dynamic range: HDR10/HLG/SDR
 Quantization range: Full/Limited
- EDID management (support for standard resolutions and custom resolutions)
 HDCP 2.2 and HDCP 1.4 compliant
- No support for interlaced video signal
- DP 1.2
- Maximum resolution: 4096×2160@60Hz 10bit 4:4:4 Maximum width: 8192 pixels (8192×1080@60Hz)
 Maximum height: 7680 pixels (1080×7680@60Hz)
- Quantization range: Full/Limited
 EDID management (support for standard resolutions and
- $\circ\,$ HDCP 2.2 and HDCP 1.3 compliant No support for interlaced video signal

Inputs

- 6x HDMI 2.0/DP 1.2 (Only one type of connector can be selected as the
- HDMI 2.0:

- IDMI 2.0:

 Maximum resolution: 4096×2160@60Hz 8bit 4:4:4

 Maximum width: 8192 pixels (8192×1080@60Hz)

 Maximum height: 7680 pixels (1080×7680@60Hz)

 Dynamic range: HDR10/HLG/SDR

 Quantization range: Full/Limited

 EDID management (support for standard resolutions and custom resolutions)
- resolutions) HDCP 2.2 and HDCP 1.4 compliant No support for interlaced video signal
- Maximum resolution: 4096×2160@60Hz 10bit 4:4:4 Maximum width: 8192 pixels (8192×1080@60Hz) Maximum height: 7680 pixels (1080×7680@60Hz)
- Quantization range: Full/Limited EDID management (support for standard resolutions and custom
- HDCP 2.2 and HDCP 1.3 compliant No support for interlaced video signal
- Support for ST-2082 (12G), ST-2081 (6G), ST-424 (3G), ST-292 (HD), and ST-
- Support for ST-2082 (12G), ST-2081 (6G), ST-424 (3G), S 259 (SD) video inputs Compatible with SD-SDI, HD-SDI, 3G-SDI and 6G-SDI Maximum resolution: 4096×2160@60Hz 10bit 4:2:2 Support for interlaced video signal

Main Outputs

- 8x HDMI 2.0 main output connectors
- Up to 4x 4K concurrent main outputs in copy mode Up to 8x DL concurrent main outputs in split mode
- 8x 10G SFP optical ports are offered to copy the HDMI 2.0 outputs.
- Maximum resolution: 4096×2160@60Hz 8bit 4:4:4

 Maximum width: 8192 pixels (8192×1080@60Hz)

 Maximum height: 7680 pixels (1080×7680@60Hz)

 Bit depth: 8bit/10bit/12bit

 Color space: YCbCr/RGB

- Dynamic range: HDR10/HLG/SDR
 EDID management (support for standard resolutions and custom
- HDCP 2.2 and HDCP 1.4 compliant Support for interlaced video signal

Flex Outputs

- 4x HDMI 2.0 for flex outputs
- Up to 4x 4K flex screens with support for Multiviewer, transition effects such as fade, test patterns, AOI, virtual pixels, etc.
- Up to 4x 4K mixing PIP layers and 4x still BKG with support for adjustment of layer position, size and Z-order, layer effects including flip, crop and mask, layer color adjustment, and layer presets.
- Auxiliary devices such as teleprompters also can be connected.

- Dynamic range: HDR10/HLG/SDR
 EDID management (support for standard resolutions and custom
- resolutions)

 HDCP 2.2 and HDCP 1.4 compliant

 Support for interlaced video signal

SDI Matrix

- 4x 12G-SDI matrix for mapping any content from the input sources, MVR, PGM and flex outputs to the output
- 12G-SDI
- Compatible with HD-SDI, 3G-SDI and 6G-SDI
 No support for bit depth and color space settings

Multiviewer

- 2x HDMI 2.0 for connecting to Multiviewer screens to monitor all the input sources, PVW and PGM.
- Allows users to select independent or copy mode and select a standard resolution and frame rate for the connectors.
 In independent mode, 2x concurrent DL outputs are supported.
 In copy mode, 1x 4K output and 1x copying output are supported.
- A variety of Multiviewer layout templates are provided.
- The Multiviewer windows can be resized and repositioned, and the width, height and color of the border can be adjusted.
- The UMD information such as resolution and frame rate can be displayed and the font color is customizable.

Ethernet

- 2x Gigabit Ethernet ports used for control and input view • One works as primary and the other as backup.
- Two Ethernet ports share the same IP address

Genlock

- Genlock synchronization signal output (with support for loop-through)

Screens

- Mian output connectors can be freely configured as independent screens or edge-blended widescreens. • Up to 4x 4K main screens are supported.

- Users can arrange the mosaic layout manually or select a layout template. If a connector used for mosaic fails, it can be replaced with another normal connector in the software. • Edge blending and LCD bezel compensation
- Virtual pixel configuration is supported, simplifying calculations between on-site screen size and P80-loaded screen pixels.
- AOI (Area of Interest) feature to customize active areas of outputs Custom test patterns
- Layers
- Any of the inputs, Multiviewer, PGM, or local images can be selected as the source of a layer.
- The Z-order of layers can be adjusted. • Layer names are displayed and can be modified.
- Layer resource usage are displayed in real time.
- Layer effects: DSK, mask, crop, flip, cut & fill, border, shadow and more Layer presets: All (or a portion) of the current layer's properties (such as input source, position, size, effects, etc.) can be saved as a layer preset in PixelFlow for easy recall. Up to 256 layer presets can be saved.

Presets

- Up to 256 presets can be saved for easy recall.
- Relative and complete presets are supported to satisfy more application
- Allows users to select preferred parameters such as transition duration and input source to save to a preset. Presets can be loaded to PVW or PGM.

BKG

- Images imported from the control computer or event controller can be used as BKG.
- Images captured from input sources and PGM can be used as BKG
- One dedicated still BKG image available on each PGM output. Up to 4 still BKG supported.
- BKG can be turned on or off.
- The BKG storage capacity is up to 1 GB and PNG/BMP/JPG/JPEG files are
- The BKG image automatically scales to fit the screen while maintaining aspect ratio and is positioned at the bottom layer by default.

Transition & Effects

- Seamless transition from PVW to PGM via Take, Cut or T-bar
- Fade in and out supported
- Screen freeze and FTB (Fade to Black) supported
- **Control Options**
- 7-inch front panel touchscreen
 Event controller U5/U5 Pro
- Event management software PixelFlow • Third-party control system Stream Deck (Companion integrated into the P80)

PixelFlow Software Functionalities

- Long-term stable running • Upgraded and visualized UI, adaptive to U5/U5 Pro/PC screens
- One click to change skins of U5/U5 Pro buttons
- Software parameter controllable by U5/U5 Pro encoders or faders • Distinct function areas and hover menu for ease of use • Fully functional simulator for offline configuration and practice

Processing Capability


- FPGA-based high-performance image enhancement architecture • Ultra-low latency, as low as 1 frame in proper configuration
- BT.601, BT.709, BT.2020, DCI-P3 color space processing support • Free conversion between SDR, HDR10 and HLG • Advanced DSK capability: smart key, chroma key and luma key

• Compatible with HDCP 1.3, HDCP 1.4 and HDCP 2.2 **Supported Resolutions**


Input	Bit Depth	Sampling Format	Supported Resolutions	Connector Bandwidth
HDMI 2.0	8bit	RGB 4:4:4 YCbCr 4:4:4 YCbCr 4:2:2	4096×2160@60Hz 8192×1080@60Hz	18 Gbps
	10bit	RGB 4:4:4 YCbCr 4:4:4	4096×2160@30Hz 4096×1080@60Hz	
		YCbCr 4:2:2	4096×2160@60Hz	
	12bit	RGB 4:4:4 YCbCr 4:4:4	4096×2160@30Hz 4096×1080@60Hz	
		YCbCr 4:2:2	4096×2160@60Hz	
DP 1.2	8bit	RGB 4:4:4 YCbCr 4:4:4 YCbCr 4:2:2	8192×1080@60Hz 4096×2160@30Hz 3840×2160@60Hz	21.6 Gbps
	10bit	RGB 4:4:4	- 8192×1080@60Hz 4096×2160@60Hz - 3840×2160@60Hz	
		YCbCr 4:4:4		
		YCbCr 4:2:2		
	12bit	RGB 4:4:4 YCbCr 4:4:4	4096×2160@30Hz	
		YCbCr 4:2:2	8192×1080@60Hz 3840×2160@60Hz	
12G-SDI	10 bit	YCbCr 4:2:2	4096×2160@60Hz	11.88 Gbps




APPLICATION

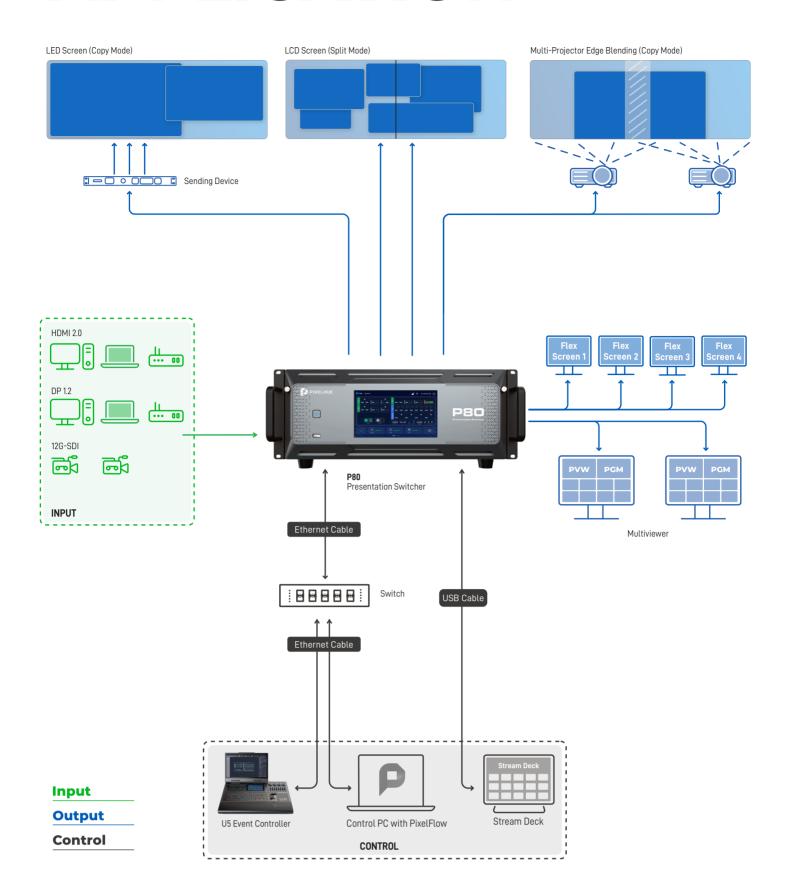

Dimensions

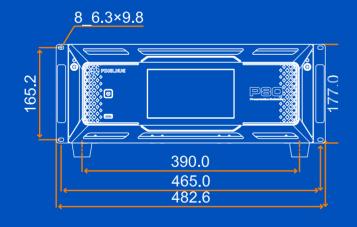



Unit: mm

Specifications

Front Screen

7" Touchscreen

Chassis

Dimensions

W 482.6 mm × D 536.0 mm × H 177.0 mm

Weight

Net weight: 23.0 kg / 50.7 lbs Gross weight (packed with flight case): 59.6 kg / 131.4 lbs

Electric Parameters

Power connector: 100-240V~, 50/60Hz Max power consumption: 450 W

Noise on Average

(@1, 0.75m height) 45 dB

Operating Environment

Temperature: 0°C to 50°C (32°F to 122°F) Humidity: 5% RH to 85% RH, non-condensing

Storage Environment

Humidity: 5% RH to 95% RH, non-condensing

Certifications

FCC, IC, CE, RoHS, CE, KC

Packing Information

1x Flight case 2x AC power cords 1x DC power cord 1x Ethernet cable 3x HDMI cables

3x DP cables 8x Optical modules 1x Phillips screwdriver 1x Customer Letter

1x Quick Start Guide
1x Safety Manual
1x Certificate of Approval

Note: Specifications subject to change without prior notice. All the product pictures are for illustration purposes only. Actual product may vary.