



Chroma-Q™ Color Block™ DB4 5-Way Power Supply

**Part No:
CHCBPSU**

S P E C I F I C A T I O N S H E E T

V 1.2

DESCRIPTION

The power supply shall provide control of up to 5 Color Block DB4 units.

The power supply shall include built-in programming features.

The power supply shall work as a stand alone unit.

The power supply shall include 9 pre-programmed looks and store up to 9 custom programmed looks on board.

FEATURES





- 1 unit controls up to 5 DB4
- 9 pre-programmed looks
- Can store 9 user programmed looks
- 9 control modes
- 3 grouping modes

OVERALL SPECIFICATIONS

Net dimensions:	Width (A): 360mm / 14.1" Height (B): 185mm / 7.3" Depth (C): 65mm / 2.6"
Net weight:	2.25kg / 5lbs
Shipping dimensions:	Width: 369mm / 14.5" Height: 190mm / 7.5" Depth: 76mm / 3"
Shipping weight:	2.50kg / 5.5lb
Power:	100-240VAC 50/60Hz
Power consumption:	4A @ 120 VAC; 2A @ 240 VAC
DMX connector:	XLR-5 male in XLR-5 female thru
Control:	ANSI E1.11 DMX-512-A
Power connector:	IEC
Colour:	Black powder coated paint
IP rating:	IP20

ORDERING INFORMATION

Model	Part No
Chroma-Q Power Supply for Color Block 4 (for up to 5 DB4)	CHCBPSU

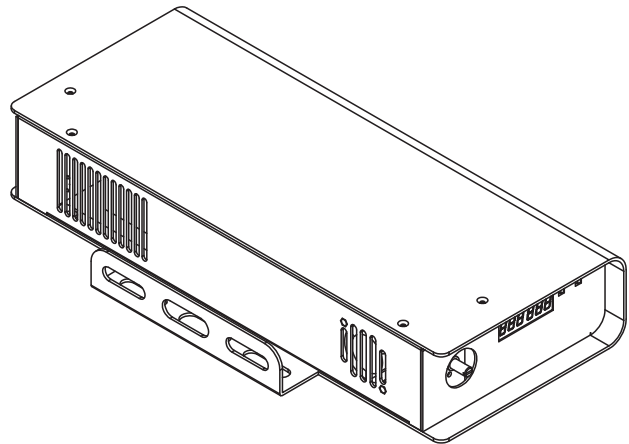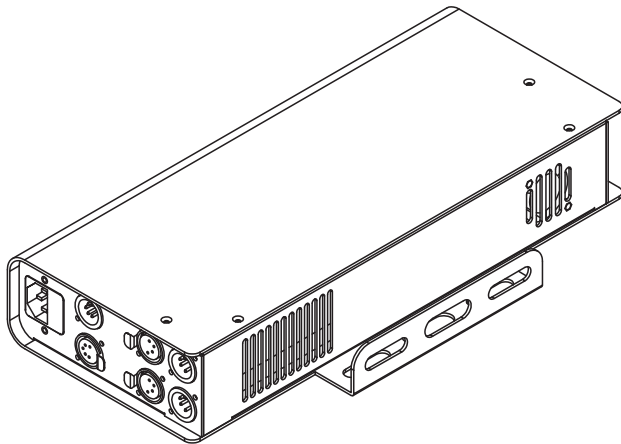

360mm / 14.1"

185mm / 7.3"



www.chroma-q.com



HQ, UK & International Sales
A.C. Entertainment Technologies Ltd.
Tel: +44 (0)1494 446000
Fax: +44 (0)1494 461024
sales@ac-et.com
www.ac-et.com

Northern UK Sales
A.C. Entertainment Technologies Ltd.
Tel: 0113 255 7666
Fax: 0113 255 7676
acnorth@ac-et.com
www.ac-et.com

North American Sales
A.C. Lighting Inc.
Tel: 416-255-9494
Fax: 416-255-3514
northamerica@aclighting.com
www.aclighting.com

Asian Sales
A.C. Lighting Asia KK
Tel: +81 (0)48-475-9377
Fax: +81 (0)48-475-9355
sales@aclighting.jp
www.aclighting.jp

All Chroma-Q LED products are licensed by Color Kinetics. Chroma-Q and all associated product names are recognised trademarks, for more information visit www.chroma-q.com/trademarks. The rights and ownership of all trademarks are recognised. The information contained herein is correct at the time of printing, however as we are constantly refining our product range we reserve the right to change the specification without notice. E60E.