



# Chroma-Q™ Cascade™ Colour Changer

**Part No:  
CHCQ3**

## S P E C I F I C A T I O N S H E E T

**V 1.3**

### DESCRIPTION

The scroller shall provide up to 300 colours using a subtractive colour mixing method. The scroller shall operate by mixing a full spectrum white light source with two gel strings containing secondary (subtractive) colours.

The scroller shall be compatible with lighting fixtures up to 178mm / 7" lens aperture and be adjustable to different fixtures using a variable mounting plate.

The scroller shall be controlled via the industry standard ANSI E1.11 USITT DMX 512-A protocol. Power and data transfer shall be provided by an XLR 4-pin connector. The DMX system shall allow for group or individual addressing of units.

The scroller shall have two internal cooling fans and diagnostic LED indicators showing Power and DMX signal presence.

The scroller shall be addressed using manual switches located on the unit. These switches shall be used to select mode of operation, scrolling speed and cooling fan speed.

The scroller shall provide a choice of manual and pre-programmed colour operation modes.

### FEATURES

- CMY colour mixing system.
- 300+ useable colours in 2 channel creative mode.
- 100 pre-defined colours in 1 channel library mode.
- Eliminates the hassle of costly custom gel strings.
- Fits fixtures with up to 178mm / 7" aperture .
- Universal mounting plate adjusts between 147-275mm / 6.8-10.8" and requires no additional mounting plates.
- Supplied with heat shield – increases longevity of gel strings.
- Suitable for up to 50° beam angle (without light loss).
- Highly reliable design.
- Rugged, lightweight construction.
- Easily accessible working components.
- Industry standard connectors.
- Fully compatible with other Chroma-Q models & accessories.
- Operation status indicators.
- Automatic self-calibration.

### ACCESSORIES

#### Model

Chroma-Q 2PU DMX/Power Unit  
Chroma-Q 8PU DMX/Power Unit  
Chroma-Q Magic Box 12PU DMX/Power Unit  
Spare Cascade gel string A + B & shield  
Various lengths of Tourflex® Datasafe™ cable

#### Part No.

CHPS02  
CHPS08  
CHMBPS12  
CQ3-26  
www.ac-et.com

### OVERALL SPECIFICATIONS

Net Dimensions:	Width (A): 306mm / 12" Height (B): 340mm / 13.4" Depth (C): 100mm / 4"
Net Weight:	2.6kg / 5.6lbs
Shipping Dimensions:	Width: 320mm / 12.6" Height: 370mm / 14.6" Depth: 110mm / 4.3"
Shipping Weight:	2.8kg / 6.2lbs
Rear aperture:	178mm / 7"
Front aperture:	241mm / 9.5"
Frame Capacity:	+300 colours
Colour Media:	Proprietary design long life substrate
Cooling:	2 fan design
Cooling Speed:	4 speeds
Addressing:	3 × rotary BCD switch (512 channels)
Working Voltage:	24VDC (+/- 10%)
Power Consumption:	1.5PU (see note below)
Protocol:	ANSI E1.11 USITT DMX 512-A
Body Material:	Aluminium
Colour:	Black
Mounting Plate:	Universal mounting system fits 160mm - 254mm fixtures (6.3 - 10")
Connectors:	XLR-4 (male) in & XLR-4 (female) through

**Note:** To simplify the choice of power supply we use the "PU" (Power Unit) to calculate the load requirements of the Chroma-Q system. For example a PS-08 will supply up to 8PU's, so you can plug-in 5 Chroma-Q Cascade (5 x 1.5PU = 7.5PU) into a CHPS08.


### ORDERING INFORMATION

#### Model

Chroma-Q Cascade Colour Changer

#### Part No.

CHCQ3

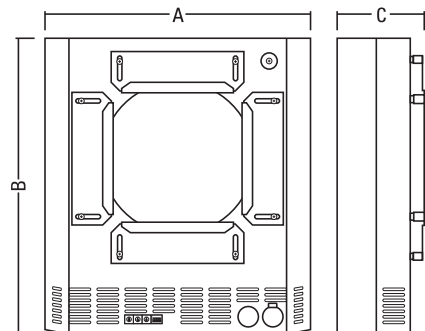

[www.chroma-q.com](http://www.chroma-q.com)



#### HQ, UK & International Sales

A.C. Entertainment Technologies Ltd.  
Tel: +44 (0)1494 446000  
Fax: +44 (0)1494 461024  
sales@ac-et.com  
www.ac-et.com

#### Northern UK Sales

A.C. Entertainment Technologies Ltd.  
Tel: 0113 255 7666  
Fax: 0113 255 7676  
acnorth@ac-et.com  
www.ac-et.com

#### North American Sales

A.C. Lighting Inc.  
Tel: 416-255-9494  
Fax: 416-255-3514  
northamerica@aclighting.com  
www.aclighting.com

#### Asian Sales

A.C. Lighting Asia KK  
Tel: +81 (0)48-475-9377  
Fax: +81 (0)48-475-9355  
sales@aclighting.jp  
www.aclighting.jp