



Chroma-Q™ 4Play™ 4 Way DMX Buffer

**Part No:
CHDMX4**

S P E C I F I C A T I O N S H E E T

V 1.3

DESCRIPTION

The device shall be a fault tolerant, self healing 4 way DMX buffer designed to fully isolate all outputs from the input and each other.

FEATURES

- 4 way DMX buffer.
- Fault tolerant, self healing.
- Each output fully isolated.
- 4 x 5 pin XLR connector outputs.
- 1 x 5 pin XLR connector input and through.
- Each output is separately generated and boosted from the original DMX signal.
- Data and power indicators.
- Suitable for truss mounting with a normal hook clamp.
- Will work with mains voltages worldwide (100-240V, 50/60Hz).
- Supplied with a chassis mounted IEC male to assist international cabling.

OVERALL SPECIFICATIONS

Net dimensions: Width (A): 148mm / 5.9"
 Height (B): 158mm / 6.3"
 Depth (C): 40mm / 1.6"

Net weight: 0.6kg / 1.3lbs

Colour: Black

Power: 100-240V, 50-60Hz, 15W

Power connector: IEC chassis male

DMX connector In: XLR5


DMX connector Out: 4 x XLR5

DMX connector Thru: XLR5

ORDERING INFORMATION

Model
Chroma-Q 4Play 4 Way DMX Buffer

Part No.
CHDMX4

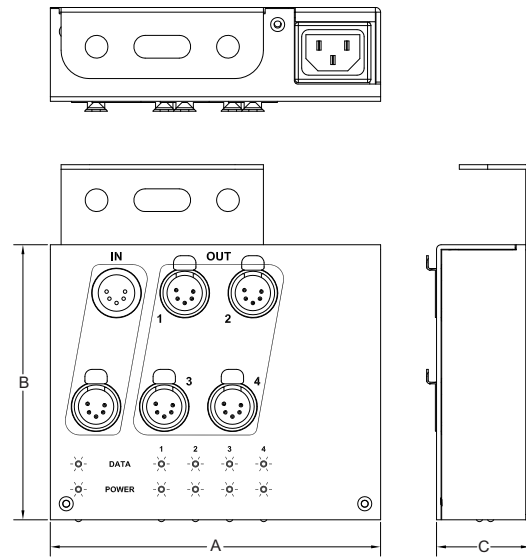

www.chroma-q.com



HQ, UK & International Sales
A.C. Entertainment Technologies Ltd.
Tel: +44 (0)1494 446000
Fax: +44 (0)1494 461024
sales@ac-et.com
www.ac-et.com

Northern UK Sales
A.C. Entertainment Technologies Ltd.
Tel: 0113 255 7666
Fax: 0113 255 7676
acnorth@ac-et.com
www.ac-et.com

North American Sales
A.C. Lighting Inc.
Tel: 416-255-9494
Fax: 416-255-3514
northamerica@aclighting.com
www.aclighting.com

Asian Sales
A.C. Lighting Asia KK
Tel: +81 (0)48-475-9377
Fax: +81 (0)48-475-9355
sales@aclighting.jp
www.aclighting.jp