



Color Span

- Create Your Own Custom LED Fixture



The Chroma-Q™ Color Span™ is a configurable low profile, ultra bright LED cove lighting and wall wash system for wide ranging applications. The fixture gives lighting designers, specifiers and end users the flexibility to specify many aspects of its design to meet their particular application needs, including:

IP rating[†]: indoor (IP20) or outdoor (IP67) rated use

Body length: 400mm / 16", 800mm / 32" or 1200mm / 48"


Body colour: 10 colours, including stock Black, White or Silver

LED colours: RGBA, single colour Red, Green, Blue, Amber, Cool White, Warm White, or any colour combination

Optics: narrow, medium or wide beam angles

This vast range of configurations, combined with a very powerful 1500 lumens output per 1.2m / 4 foot and ultra slim design, makes the Color Span suitable for a wide range of wall wash, cove, effects and feature lighting applications in the architectural and entertainment sectors.

As well as benefitting from the same high quality components and innovative LED technologies found in other leading Chroma-Q LED products, the fixture's highly efficient solid-state technology requires less power and maintenance compared to conventional luminaires, enabling it to wash a 21.6m / 72 foot long wall from just a single wall outlet.

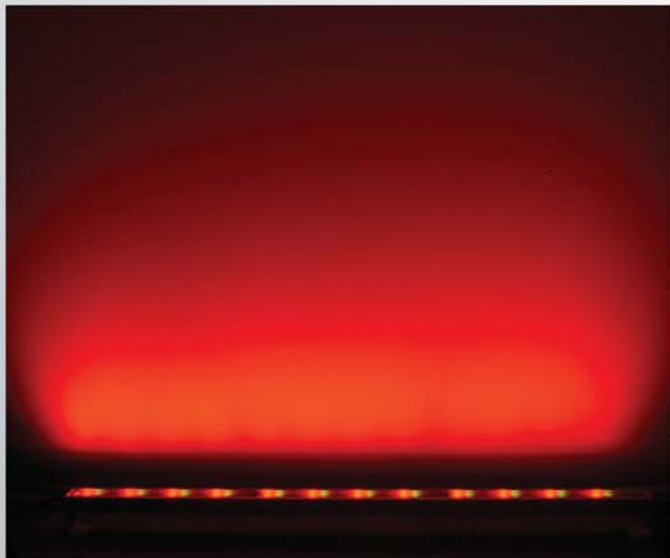

Key Features

- ▶ Configure the IP rating[†], body length, body colour, LED colours (4 circuits) and optics
- ▶ Low profile LED cove lighting and wall wash system
- ▶ Ultra bright - 1500 lumens per 1.2m / 4ft
- ▶ Choice of 2, 6 & 18 way power supplies
- ▶ Smooth, linear dimming curve
- ▶ Optional RGBA *Magic Amber configuration

*Magic Amber is the term used for the unit's ability to bring in Amber when mixing colours that require it.

Color Span Configuration Options / Product Codes

Configure your Color Span fixture by choosing from the following options

IP Rating†	Length in (mm)	Body Colour	LED Colours (in sets of x4 LEDs)	Beam Angle	= Your Product Code
IP20	400	BK = Black, WH = White	R = Red	N = Narrow	CHSP...(followed by your 5 option codes)
IP67	800	SI = Silver, GO = Gold	G = Green	M = Medium	
	1200	GR = Green, RE = Red	B = Blue	W = Wide	
		PE = Pewter, CH = Champagne	A = Amber		
		BL = Blue, LB = Light Bronze	CW = Cool White		
			WW = Warm White		
Examples:					
IP20	400	BK	RGBA	N	CHSP-IP20-400-BK-RGBA-N
IP20	800	WH	RRRR	M	CHSP-IP20-800-WH-RRRR-M
IP67	1200	BL	GGGG	W	CHSP-IP67-1200-BL-GGGG-W

Color Span Specification

	400mm / 16" Length	800mm / 32" Length	1200mm / 48" Length
Dims. (no fixings) - IP20 Rated Enclosure	446mm x 96mm x 54mm / 17.6" x 3.8" x 2.1"	852mm x 96mm x 54mm / 33.5" x 3.8" x 2.1"	1258mm x 96mm x 54mm / 49.6" x 3.7" x 2.1"
Dims. (no fixings) - IP67 Rated Enclosure	456mm x 101mm x 62mm / 17.9" x 4.0" x 2.5"	862mm x 101mm x 62mm / 33.9" x 4.0" x 2.5"	1269mm x 101mm x 62mm / 49.9" x 4.0" x 2.5"
Weight - IP20 Rated Enclosure	1.1kg / 2.5 lbs	2kg / 4.5 lbs	2.8kg / 6.1 lbs
Weight - IP67 Rated Enclosure	2.5kg / 5.5 lbs	4.7kg / 10.4 lbs	6.3kg / 13.8 lbs
Connector in	Ethercon - RJ45		
Colour	Black, White, Silver, Gold, Green, Red, Pewter, Champagne, Blue & Light Bronze		
Built-in Hardware	Angle bracket for wall, ceiling & floor mounting		
Lamp Life	Up to 25,000 hours		
Approvals	Pending		

Photometric Performance

Source - 400mm / 800mm / 1200mm	16 / 32 / 48 separate LEDs	Optics & Distribution	Close focus lens, symmetrical direct illumination
Lumen Output - 400mm	500 Lumen (based on RGBA LED circuits)	Beam Angle (approx.)	Narrow (12°), medium (23°) or wide (40°)
Lumen Output - 800mm	1000 Lumen (based on RGBA LED circuits)	CCT	Adjustable 1000-10,000K
Lumen Output - 1200mm	1500 Lumen (based on RGBA LED circuits)	CRI & Colour Gamut	Up to 82%, performance enhanced

Color Span Power Supplies

	2 Way	6 Way	18 Way
Product Code	CHSPPS02 - 400 / 800 / 1200	CHSPPS06	CHSPPS18
Dims.	194mm x 140mm x 127mm / 7.6" x 5.5" x 5"	405mm x 362mm x 91mm / 16" x 14.3" x 3.6"	660mm x 483mm x 88mm / 26" x 19" x 3.5"
Weight	2.8kg / 6.2lbs	9.4kg / 20.6lbs	22.3kg / 49 lbs
Power	100-240V AC 50/60Hz auto switching	100-240V AC 50/60Hz auto switching	100-240V AC 50/60Hz auto-switching
Power Consumption	2.5A @ 110V AC; 1.75A @ 230V AC	7A @ 120V AC; 3.5A @ 230V AC	20A @ 120V AC; 10A @ 230V AC
Connector in/out	RJ45	RJ45	RJ45
Control	ANSI E1.11 USITT DMX 512-A	ANSI E1.11 USITT DMX 512-A	ANSI E1.11 USITT DMX 512-A
Power Connector	IEC power cord	IEC power cord	IEC power cord
Colour	Black	Black	Black
IP Rating	IP20	IP20	IP20
Approvals	EN55103-1, EN55103-2, ICES-003/FCC PART 15, CAN/CSA-C22.2 No.60950-1-07, UL60950-1	EN55103-1, EN55103-2, ICES-003/FCC PART 15, CAN/CSA-C22.2 No.60950-1-07, UL60950-1	EN55103-1, EN55103-2, ICES-003/FCC PART 15, CAN/CSA-C22.2 No.60950-1-07, UL60950-1

† For details, please see www.chroma-q.com/ip



UK & International Sales
 A.C. Entertainment Technologies Ltd.
 Tel: +44 (0)1494 446000
 Fax: +44 (0)1494 461024
sales@ac-et.com
www.ac-et.com

Northern UK Sales
 A.C. Entertainment Technologies Ltd.
 Tel: 0113 255 7666
 Fax: 0113 255 7676
acnorth@ac-et.com
www.ac-et.com



North American Sales
 A.C. Lighting Inc.
 Tel: +1 416-255-9494
 Fax: +1 416-255-3514
northamerica@aclighting.com
www.aclighting.com/northamerica

Asian Sales
 A.C. Lighting Asia KK
 Tel: +81 (0)48-475-9377
 Fax: +81 (0)48-475-9355
asia@aclighting.com
www.aclighting.com/asia