

# PRODUCT SPECIFICATIONS

**GIGACORE 26-I**  
**20S10-4S25-2S40**

PRELIMINARY

Description: Technical specifications GigaCore 26-I | PRELIMINARY

Luminex reserves the right to modify the technical specifications at any given time without prior notice.  
No rights can be claimed from these specifications.



**MADE IN BELGIUM**

## Gigabit Ethernet switch

The GigaCore 26-I is a **40 Gigabit** Ethernet switch, dedicated to AV integration, installation and touring, designed to support the most advanced AV protocols. GigaCore 26-I is the ideal solution to serve as the high bandwidth backbone for advanced Pro AV networks with a star or mesh topology.

Each GigaCore can be configured through an intuitive built-in AV Web UI but also, System-wide and consistent management across the Luminex network is possible with the Araneo network monitoring, planning and management software. Araneo will boost your productivity and confidence in the network and reduce commissioning times significantly and the complete network can now be managed and supervised with one application.

GigaCore 26-I is an indispensable part of any AV network where higher bandwidth, reliability and a quick and easy setup are needed.

As a user, you don't need to make choices nor tradeoffs as GigaCore handles most AV protocols for you out of the box: Pre-defined QoS/DiffServ (Quality of Service) settings, optimized IGMP (Internet Group Management Protocol) per group (VLAN) and pre-defined yet editable groups (VLANs) to easily separate your network in different applications making converged networks obvious, easy and reliable. Also included out of the box is the advanced, automated redundancy protocol RLinkX that ensures redundant links and ring topology within your GigaCore network.

Bandwidth, connectivity, and port availability are not an issue anymore with 20 x independent SFP+ ports capable of data transfer speeds of up to 10 Gbps and 4 x SFP28 ports for data transfer speeds of up to 25 Gbps and 2x QSFP ports for data transfer of up to 40Gbps.

Time synchronization is crucial in many applications and with GigaCore 26-I you have a hassle free PTPV2 enabled switch which will work for most major audio protocols (e.g. AES67, AVB/Milan, ST2110, Dante, Q-sys/Q-lan, ...) without the need for making any complicated device settings.

With 2 built-in power supply units, the question of redundant power is solved in one and the same 1U rack space.



The GigaCore 26-I features Luminex signature per-port RGB group LEDs which help recognize Group (VLAN) assignment for each port.

### Applications:

- Large system integrations
- Theaters
- Concert halls
- Convention centers
- Sports arenas
- Broadcast and recording studios, OB vans
- Cruise ships
- Theme parks
- Hospitality installs (Hotels etc)
- And other fixed installations
- ...

ORDERING INFORMATION	
Product name:	Part number:
GigaCore 26-I – 20S10-4S25-2S40	LU 01 00101



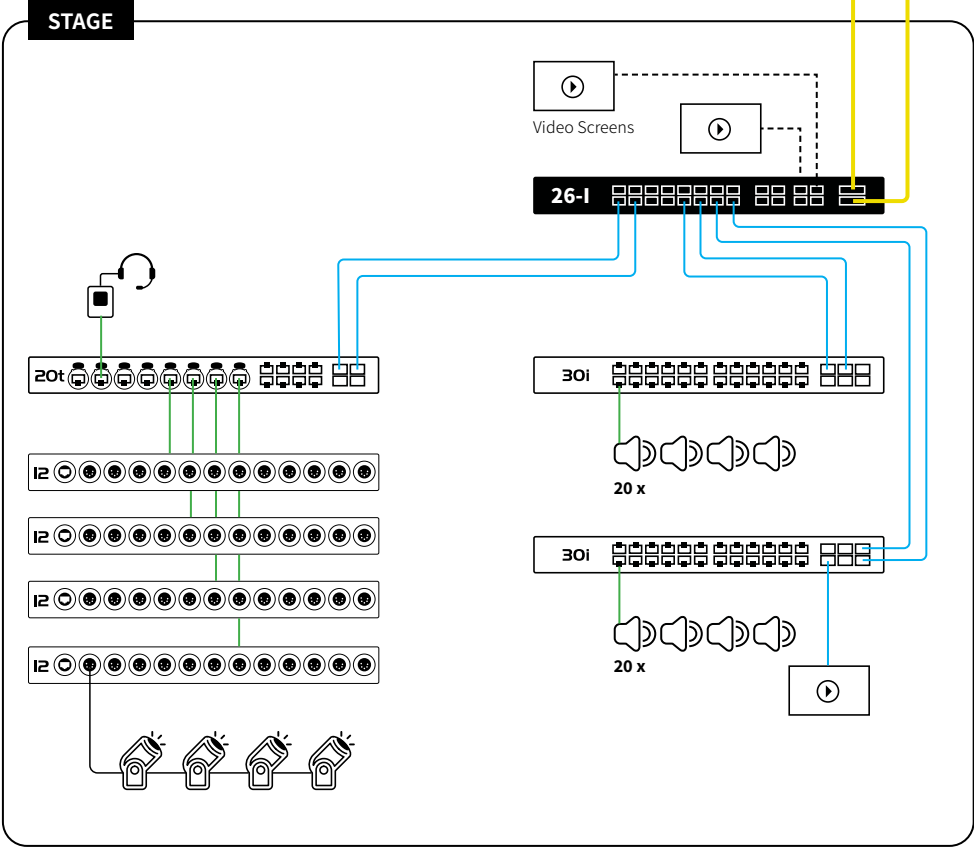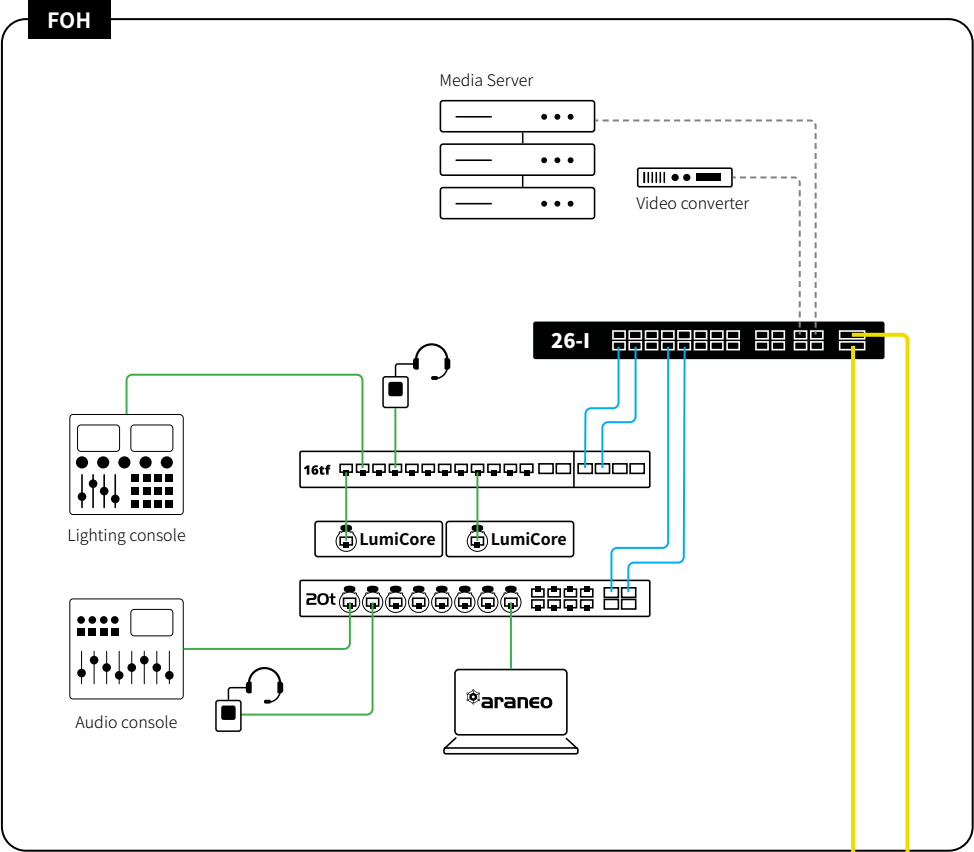

## TECHNICAL SPECIFICATIONS

MECHANICAL		GigaCore 10t
Enclosure		Robust all metal housing
Dimensions (WxDxH)		482x284x43,2 mm   19x11,18x1,7 inch (preliminary)
Material thickness		1 mm (to be determined)
Mounting Type		Rack mount
Weight		4.6 kg (preliminary)
Packaging Dimensions		545 x 335 x 125 mm (preliminary)
Packaged Weight		6,5kg (preliminary)
CONNECTIVITY		
Network		20x 10 Gbps / 1 Gbps SFP+ cages on front panel
		4x 25Gps SFP28 cages on front panel
		2x40Gbps QSFP cages on front panel
Power		IEC (C14) 1x for each built-in power supply (2 PSU's built-in)
Backup power		IEC (C14) 1x for each built-in power supply (2 PSU's built-in)
TEMPERATURE MANAGEMENT		
Intelligent Control		Yes
Number of fans		3x
Position of fans		Rear panel
Airflow Direction		Front to rear
USER INTERFACE		
Device status		RGB LEDs
		• OK
		• Power
		• RLinkX
Dynamic labeling		No E-ink Display
10GBPS SFP+ PORT SPECIFICATIONS		
SFP cage type		SFF-8431 (SFP+, backward compatible with SFP)
Port speed		10G BASE-X or 1000 BASE-X
Port sensing		Fixed speed
25GBPS SFP28 PORT SPECIFICATIONS		
SFP cage type		SFF-8402 (SFP28, backward compatible with SFP+ and SFP)
Port speed		25G BASE-X, 10G BASE-X or 1000 BASE-X
Port sensing		Fixed speed
40GBPS QSFP PORT SPECIFICATIONS		
SFP cage type		SFF-8436 (QSFP)
Port speed		40G BASE-X, four times 10G BASE-X
Port sensing		Fixed speed



SWITCH FEATURES	
Boot time	TBC
Redundant links (RLinkX)	Yes
Link Aggregation (MultiLinkX)	Yes
Group function (VLANs)	Yes
Ethernet compliance	IEEE 802.2 IEEE 802.3 IEEE 802.3u IEEE 802.3x Flow Control IEEE 802.3ab Gigabit Ethernet IEEE 802.3af PoE(optional) IEEE 802.3at PoE+(optional) IEEE 802.3bt PoE++ 90W(optional) IEEE 802.3ae IEEE 802.1p CoS IEEE 802.1d Spanning Tree IEEE 802.1w Rapid Spanning Tree IEEE 802.1s Multiple Spanning Tree IEEE 802.1Q VLAN IEEE 802.1Qav MVRP IEEE 802.1 BA-2011 -> AVB (Audio Video Bridging) IEEE 802.1ab LLDP IEEE 1588-2008 PTPv2
Jumbo frames	Yes, supported up to 9,216 bytes MTU (with restrictions when using AVB)
Supported protocols	Avnu AVB/Milan (Free of license) Dante RAVENNA/AES67 Ethersound Q-SYS/Q-LAN IPMX sACN ArtNet MANet HogNet RTTrPL (BlackTrax) ST2110 ...



Audio protocol compliance	Yes, low jitter and hardware timestamping (IEEE 1588-2008)
Ethernet switch type	Full non- blocking wire-speed switching performance
Memory	Flash 1 Gb RAM – 8 Mb NOR flash 4 Gb EMMC storage
Mac Address table	16384 entries
Address learning / aging	Self learning, Auto aging
Switching Capacity (Full duplex)	760 Gbps (Full duplex)
Switching throughput 64Byte	565.48Mpps
IGMP Querrier	Yes (V1 V2 V3)
IGMP Snooping	Yes, enabled by default (V1 V2 V3)
MLD	Yes, enabled by default
L3 Routing	IP interface per Group (VLAN)
DHCP server	Yes
<b>MANAGEMENT</b>	
Configuration	Built-in WebUI
Network wide configuration	Yes, with Araneo software
Firmware upgrades	Via WebUI or network wide with Araneo - Contingency option with second FW file stored
<b>POWER</b>	
Power input	100-240 VAC
Backup power	Yes with 2nd built-in PSU
Power consumption	100W (preliminary)
<b>ENVIRONMENTAL</b>	
Operating temperature	0 to +50 °C
Storage temperature	-40 to +70 °C
Humidity (non condensing)	5 to 95% RH
<b>NOISE LEVEL</b>	
Noise level @ 1m	TBC
<b>APPROVALS PENDING</b>	
Electromagnetic emissions and immunity	FCC Part 15 CFR 47 class A CAN/ICES-003 EN 61000 EN 55032 EN 55024
Safety	IEC 62368-1 EN 62368-1 UL 62368-1 CAN/CSA-C22.2 No. 62368-1
Certificates and approvals	cSGSUS Mark (UL) CE Mark UKCA Mark CB Certificate
Green	RoHS REACH



