

ControlGo



Portable 1-Universe DMX Controller, DMX, RDM, CRMX and battery operated

ORDER CODE: **CONTROLGO**



ControlGo is the ultimately flexible, multi functional lighting controller. This incredibly versatile, simple to use tool combines a fixture remote, RDM Tool, CRMX transmitter, DMX controller and DMX recorder into a single, portable and durable device.

Whether flashing out a film set, setting addresses on a tradeshow stand, or controlling battery uplighters, the **ControlGo** is THE device you need to get up and running quickly and easily.

Taking power from a host of options - NP-F or V-Lock batteries, DC 12-48V or USB-C - you won't find a place you can't find some power. Featuring wired and CRMX wireless DMX & RDM, the **ControlGo** is compatible with up to 42 fixtures of any brand over 1 Universe. Its intuitive touchscreen interface, plus physical buttons and encoders, gives fast, easy and accurate access to its functions.

From Film sets to events ... Lights, Control, Go!

MAIN FEATURES

- One Universe DMX Controller , RDM controller, DMX recorder, Remote UI
- 5" touchscreen with 4 RGB encoders and physical buttons for unprecedented user experience
- Signal output through XLR, Wireless CRMX, and remote UI connector
- Power sources: NPF batteries, V-mount adapter plate, 48V DC remote ui, 12-48V DC input through SF6-M 4p, USB type-C 5-12V power input

TECHNICAL SPECIFICATION

BODY

- Hardware on-board: see available accessories
- Body: sturdy polycarbonate body
- Body colour: black


CONTROL

- Protocols: DMX512, RDM, CRMX + WDMX, Bluetooth
- DMX channels: 512 channel
- Wireless Control: included, LumenRadio TimoTwo DMX/RDM compatible with both CRMX, CRMX2 (Lumen Radio) and W-DMX (Wireless DMX), Bluetooth capable
- RDM: RDM for remote monitoring and settings
- Display: 5" Touch LCD
- Firmware upgrade: yes, via USB pen drive, onboard memory or DMX interface (UPBOXPRO/UPBOX1) not included
- Other: 4 rotary push-encoders with RGB backlight

ACCESSORIES & RELATED PRODUCTS

- CTRGHANDLE Soft handle for CONTROLGO
- CTRGABSC Empty ABS case for CONTROLGO
- CTRGVMADP V-Mount adapter for CONTROLGO
- CTRGQMP Quick mount plate for CONTROLGO

TECHICAL DRAWINGS

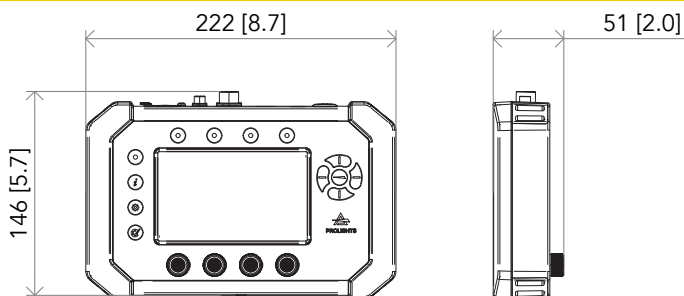

ELECTRICAL

- Low Voltage DC mains: 12-48V via DC IN, 48V via Remote Connector, 5-9-12-20V via PD3.0 over USB-C, 7.2V via battery slots
- Max power consumption: 8 W

BATTERY

- Battery: 7.2 V NP-F550/F570/F750/F770/F960/F970 type battery or V-Mounts (14.4V) via dedicated accessory

PHYSICAL

- IP rating: 20
- Signal connection: Seetronic XLR 5p OUT connector
- Low Voltage DC connector: Weipu SA6(12-48V), Weipu SA12 (48V - RemoteConnector), USB type C PD3.0, Battery slots
- Weight: 0.6 kg

CERTIFICATIONS / APPROVALS

- Certifications / Approvals: CE, RCM, FCC, cTUVus

- CTRGCABLE 7,5 m cable for CONTROLGO
- CTRGEVACASE Eva Case for CONTROLGO
- CTRGNL Neck lanyard with double balancing and adjustable side strips for CONTROLGO

CERTIFICATIONS / APPROVALS



Conforms to UL STD. 1573
Certified to CSA STD: C22.2 NO. 166

Visit our website for specifications and tech documentations

