

EclFresnel CT+XLIP

IP65 1200W Led Fresnel with 6 color LED source, 300mm-12"glass lens, zoom 10-90°

ORDER CODE: ECLFRCTPXLIPBK



TECHNICAL SPECIFICATION

LIGHT SOURCE

- Source: 1'500W 6 colour LEDs source (driven @1'200W)
- CCT: 1.800 K - 20.000K
- Luminous flux: (10°) 22'322 lm - (90°) 43'642 lm @4.000 K
- Lux: (10°) 18'113 lx - (90°) 1'485lx @5m @4.000 K
- CRI: 95 @3.200K; 95 @5.600K
- R9: 98 @3.200K; 93 @5.600K
- TLCI: 95 @3.200K; 97 @5.600K
- TM30 Rf: >93 @3.200K; >93 @5.600K
- TM30 Rg: <103 @3.200K; <103 @5.600K

OPTICS

- Zoom range: 10° - 90° manual
- Lens diameter: 12" / 300mm / 0.47"
- Lens type: Fresnel glass lens with AR coating
- Lens effect: Glass Fresnel lens providing a classic light fall-off
- Other: spigot, barndoor and gel frame included

COLOUR SYSTEM

- Colour control: XY, CCT, Gel with Source Emulation, Tungsten emulation, HSI, User preset
- Colour mixing: 6 colour LEDs source
- CCT: Linear CCT adjustment from 1.850 K-20.000K

BODY

- Bracket system: Sliding bracket for adjustable weight balance and handle on the top of the body for easy transportation
- Hardware on-board: filter frame, 8 doors barndoor, spigot
- Body: weatherproof IP65 construction
- Body colour: RAL 9004
- Other: Handle on the top, double safety system on the front for the accessories, strengthened zoom movement system for enhanced durability and stability

CONTROL

- Protocols: DMX512, RDM, CRMX
- Stand Alone: 4 pushable RGB backlit encoder
- Wireless Control: included, LumenRadio TimoTwo DMX/RDM compatible with both CRMX, CRMX2 (Lumen Radio) and W-DMX (Wireless DMX), Bluetooth capable

The **EclFresnel** CT+ XLIP stands out as a bright IP65-rated Fresnel hard source, crafted to replace traditional 5K Tungsten and 2.5K HMI lighting in film sets and large-scale indoor and outdoor setups. At the heart of this fixture is a robust 1500W (driven @1200 W) LED source, featuring 6 color emitters.

Its design with integrated power supply simplifies installation and wiring for both on-location use and permanent installations.

EclFresnel CT+ XLIP boasts a 300mm (12 inches) glass Fresnel lens, offering an impressive zoom range from 10° to 90° and 44.000 fixture lumens. This design maintains high efficiency even at narrow beam angles, ensuring a bright output at long throw projection.

Powered by Spektra Os, this luminaire guarantees light consistency, delivering a higher luminous flux across colors and whites. This results in a broader color space and a richer light spectrum, achieving exceptional values in CRI, TLCI, SSI, and TM30 indices, meeting the highest professional lighting requirements.

Enhanced with a more powerful processing unit, the **EclFresnel** CT+ range offers an unparalleled user experience. It provides refined control over light and color, complemented by more intuitive standalone operations. This is achieved through a larger display, backlit encoders, and advanced connectivity options, both wired and wireless.

EclFresnel CT+ also operates silently, making it an essential, durable workhorse for large film sets, theaters, and studio applications.

MAIN FEATURES

- 1500W (driven @1200 W) 6 color LED Fresnel
- 300mm/12" glass lens with 10-90° zoom
- IP65 for indoor and outdoor use
- New UI with 2.8" display and 4 backlit pushable encoder

- RDM: RDM for remote monitoring and settings
- Display: 2.8" Color display
- Firmware upgrade: via DMX with UPBOXPRO (USB-DMX interface not included)
- Master/Slave: for synchronised operation of more units linked in a chain

ELECTRONICS

- Dimmer: linear 0 ~ 100% electronic dimmer
- Dimmer curves: 6 selectable dimming modes available
- Strobe / shutter: 1 - 30 Hz, electronic
- Operating temperature: -20° C / +45° C (-4° F / +113° F) Ta
- LED Control: flicker free frequency with adjustable PWM
- Selectable PWM: 1282 ~ 40.000 Hz

ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Low Voltage DC mains: 48V (WEIPU SY25 4P connector)
- Max power consumption: 1260W
- Standby power: 7,5 W
- Output (at 230V): 2 units on a single power line
- Power factor: > 0,97

PHYSICAL

- IP rating: 65 for temporary outdoor use (*)
- Cooling: combination of heat pipe cooling system and low noise fan
- Signal connection: IP65 Seetronic XLR 5p IN/OUT connectors
- Data connection: IP65 WEIPU SF12 4P-F
- Power connection: Seetronic powerCON TRUE IP65 IN
- Low Voltage DC connector: 48V WEIPU SY25 4P connector
- Dimensions (WxHxD): 485x676x583mm / 19.09"x26.61"x22.95"
- Weight: 27,7kg / 61.07lbs
- (*) NOTE: Suitable for permanent outdoor use, provided installation and maintenance cycles by qualified technicians are carried.


CERTIFICATIONS / APPROVALS

- Certifications / Approvals: CE, RCM

ACCESSORIES & RELATED PRODUCTS

- | | | | |
|------------------|--|-------------------|--|
| ▪ FCLECLFRCTPXLP | Flight case for 1 pc of ECLFRCTPXLP series | ▪ ECLFRCTPXLBD | Barn door 8 directional flaps to adjust the light beam for ECLFRCTPXL series |
| ▪ ECLFRSPG | Spigot for PROLIGHTS fixtures | ▪ ECLFRCTPXLKPOYO | Pole operated aluminium yoke bracket and zoom kit for ECLFRCTPXL series |
| ▪ ECLFRCTPXLFF | Filter frame for ECLFRCTPXL series | | |

TECHICAL DRAWINGS

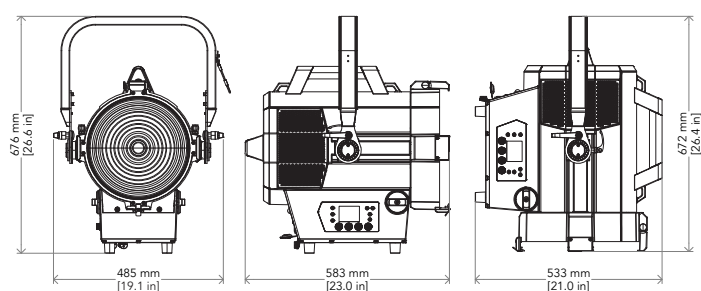

CERTIFICATIONS / APPROVALS

Visit our website
for specifications and
tech documentations

